


NCI VINYL AND CANVAS

BLEACHER AISLE PAD

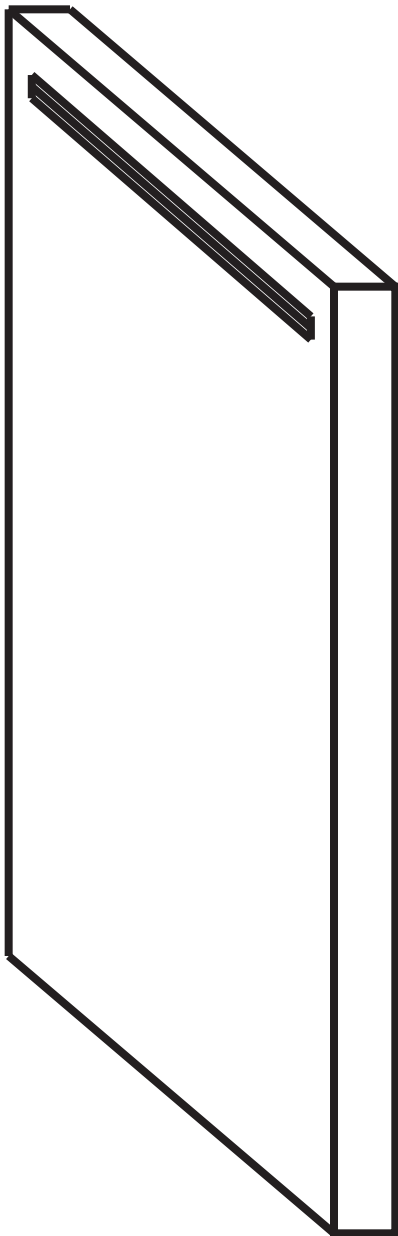

PROJECT _____ DATE _____

COVER: Cover is constructed of 14 ounce vinyl coated polyester.

Cover is mildew, rot and tear resistant

Vinyl meets Class "A" fire rating

FILLER: Foam filler is a 2" high density polyurethane foam.

ATTACHMENT: Pads are attached to bleacher using a velcro fastening system. Velcro is screwed to the bleacher aisle to accept matching velcro sewn to the back of the pad.

CONSTRUCTION: All pads are sewn using marine grade polymatic thread. Velcro is no less than 1 1/2" thick. Velcro is sewn to pad back.

NCI Vinyl and Canvas 150 Skidmore Road (631) 254-3913 www.ncigympads.com